Schulthess washing machine

PROLINE W130 / W160



Model
Chrome steel



Model
Anthracite

Model Grey matt



	W130	W160
	130 l	160 l
1 : 9	14 kg	18 kg
1 : 10	13 kg	16 kg

Features

- Industrial washing machine for gentle fabric care
- «Expert» control with 20 standard programmes and 24 freely programmable positions
- Intuitive operation with 4.3" colour display
- High spin speed for minimum residual moisture (up to 46 %)
- Stainless steel drum and washing liquor tank for efficient washing and rinsing processes
- Cold, hot or soft water connection (selectable on site)
- Language selection button for 23 languages
- Start delay with calendar function
- Swiss made and designed for over 30,000 operating hours

Options

- «Expert+» control with 20 standard and 90 profiClean programmes and 24 freely programmable positions
- WLAN interface for programme and software updates
- Connection for 8 liquid detergent dosing pumps
- Standard machine plinth (280 mm)
- Special machine plinth (355 mm)
- Machine plinth with fluff filter drawer
- Mains blocking set (load shedding/current peak)


12.02.2024 All rights reserve

Technical data proLine W130 / W160

Company or brand name		Schulthess	
Device type		Washing machine	
Type or sales description	proLine	W130	W160
Product no.		4204.1	4205.1
Properties			
Filling factor (1:9)	kg	14	18
Filling factor (1:10)	kg	13	16
Drum volume	l	130	160
Drum opening	mm	450	450
Drum diameter	mm	620	620
Drum depth	mm	427	527
Spin speed	rpm	1100	1100
g-factor		419	419
Residual moisture	%	48	48
Programme duration cold water connection (min.) [2]		55	55
Programme duration hot water connection 70 °C (min.) [2]		46	46
Energy consumption [3]/ [4]	kWh	2,4 / 0,45	3,1 / 0,45
Water consumption [2]	l	112	144
Electrical installation			
Supply voltage	V	400 3N~ / 50 Hz	400 3N~ / 50 Hz
Connected load	kW	14,9	18,0
Electric heating	kW	14,5	17,6
Drive	kW	1,5	1,5
Protection	AT	25	32
Sanitary installation			
Water pressure on site	MPa	0,15 –1,0	0,15 –1,0
Cold water hard inflow ¾-inch	l/min	› 13	› 13
Hot water supply from central boiler max. 70 °C ¾-inch	l/min	› 13	› 13
Drain quantity drain valve 75 mm	l/min	260	260
Control system		Expert / Expert+	Expert / Expert+
Standard programmes		•/•	•/•
24 programmes, freely programmable		•/•	•/•
ProfiClean sets		–/•	–/•
Disinfection programmes		–/•	–/•
WetClean programmes		–/•	–/•

Explanations:
– not available • available [2] Cotton 60 °C without pre-wash [3] Cotton 60° prg, cold water [4] Cotton 60° prg, hot water 70°

1 Main switch
2 Electrical connection
3 Water connection
4 Overflow / Venting
5 Connection for liquid detergent
6 Drain pipe

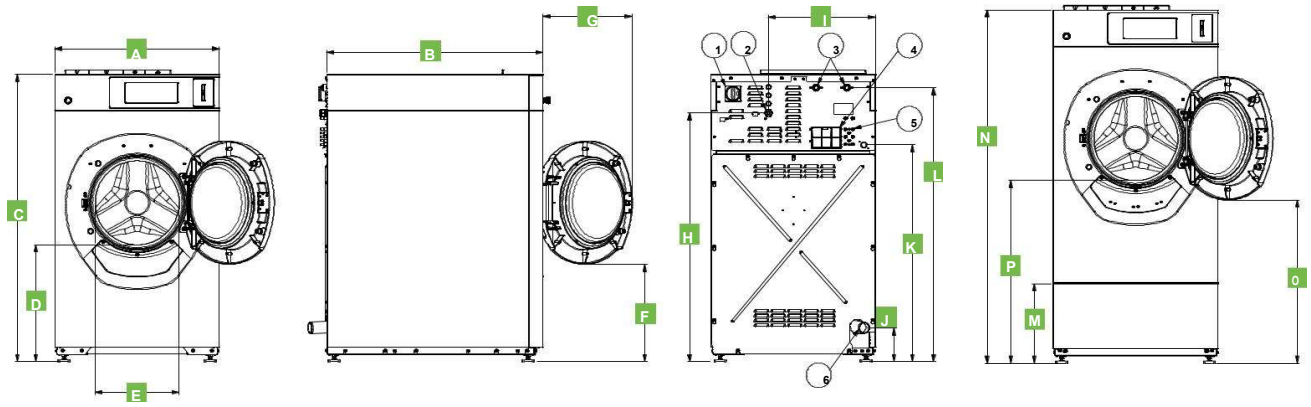

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Weight (kg)
W130	790	935	1360	530	450	450	–	1200	590	150	–	1300	330	1630	720	800	350
W160	790	1035	1360	530	450	450	–	1200	590	150	–	1300	330	1630	720	800	365

SWISS MADE