A complete choice for every business

G 21.50 **G** 26.50 **G** 32.50

High performance (80-145 kg/h)



G 15.35 **G** 18.35 **G** 21.35 **G** 26.35

Medium/high performance (40-70 kg/h)



G 14.25

Medium performance (25 kg/h)



G line

Usable Roller Width	From 210 to 320	From 148 to 258 cm	145 cm
Feeding	Rotating Feeding Belts	Rotating Feeding Belts	Aluminium Table
Temperature Control	2 Sensors + Safety Thermostat	2 Sensors (1 for G15.35) + Safety Thermostat	1 Sensor + Safety Thermostat
Frequency Controlled Variable Ironing Speed	✓	✓	✓
Automatic Cool-Down	✓	✓	✓
Maintenance-Free Belts Drat Roller	✓	✓	✓
Steam Extraction System	SKS - Steam Extraction Hood (GMP Exclusive Solution)	Air Blades	Air Blades
Cylinder Support System	Floating Support System, With 4 Rollers Each Side (GMP Exclusive Solution)	Bars	Bars
Sewed Meta-Aramid Detaching Linen Ribbons	✓	✓	✓
Cylinder Surface	Choose: Polished or Anti-Corrosion Chrome Treatment (Guaranteed 3 years)	Choose: Polished or Anti-Corrosion Chrome Treatment (Guaranteed 3 years)	Choose: Polished or Anti-Corrosion Chrome Treatment (Guaranteed 3 years)
Available Heating Types	Electric, Gas, Indirect Steam	Electric, Gas, Indirect Steam	Electric, Gas


Technical data & installation information

CHARACTERISTICS AND DATA ARE NOT BINDING AND CAN BE SUBJECT TO CHANGE WITHOUT NOTICE.

		G14.25	G15.35	G18.35	G21.35	G26.35
Cylinder Dimensions		1450 x Ø270 mm	1480 x Ø325 mm	1800 x Ø325 mm	2100 x Ø325 mm	2580 x Ø325 mm
Supply Tension *						
Electric		V.400/3N/50Hz	V.400/3N/50Hz	V.400/3N/50Hz	V.400/3N/50Hz	V.400/3N/50Hz
Gas/Steam		V.230/1/50Hz	V.230/1/50Hz	V.230/1/50Hz	V.230/1/50Hz	V.230/1/50Hz
HEATING SOURCE						
Electric	Heating Power	13,8 kW	20,7 kW	24,3 kW	27 kW	34,2 kW
Gas	Thermal Power	13,6 kW	22 kW	25,6 kW	27 kW	33,5 kW
	Gas Consumption Nat. Gas	1,44 m³/h	2,26 m³/h	2,71 m³/h	2,82 m³/h	3,53 m³/h
	Gas Consumption LPG	1,05 kg/h	1,8 kg/h	2,02 kg/h	2,2 kg/h	2,5 kg/h
Steam	Average Consumption	n/a	19 kg/h	22 kg/h	26 kg/h	32 kg/h
MOTOR(S)						
Electric/Steam		0,26 kW	1 kW	1 kW	1 kW	1 kW
Gas		0,32 kW	1,2 kW	1,2 kW	1,2 kW	1,2 kW
TOTAL ABSORPTION						
Electric		V.400/3: 21 A	V.400/3: 31 A	V.400/3: 37 A	V.400/3: 41 A	V.400/3: 50,5 A
Gas/Steam		V.230/1: 2,2 A	V.230/1: 5 A	V.230/1: 5 A	V.230/1: 5 A	V.230/1: 5 A
Ironing Speed, Variable		0,8÷3 m/min	1,6÷5 m/min	1,6÷5 m/min	1,6÷5 m/min	1,6÷5 m/min
Steam Extraction		280 m³/h	280 m³/h	280 m³/h	280 m³/h	280 m³/h
Fumes Extraction		100 m³/h	140 m³/h	140 m³/h	140 m³/h	140 m³/h
Hourly Production (Recommended Moisture 50%)		25 kg	43 kg	50 kg	56 kg	75 kg
Ironer Dimensions (wxdxh)		2010x510x1080 mm	2010x550x1100 mm	2340x550x1100 mm	2640x550x1100 mm	3140x580x1150 mm
Packing Dimensions (wxdxh)		2130x690x1300 mm	2140x730x1560 mm	2490x730x1560 mm	2890x730x1560 mm	3290x730x1560 mm
Weight, Gross/Net		360/310 kg	497/450 kg	540/490 kg	602/548 kg	700/635 kg


* DIFFERENT VOLTAGES THAN INDICATED AVAILABLE ON OPTION, PLEASE CONTACT OUR SALES OFFICES

G14.25

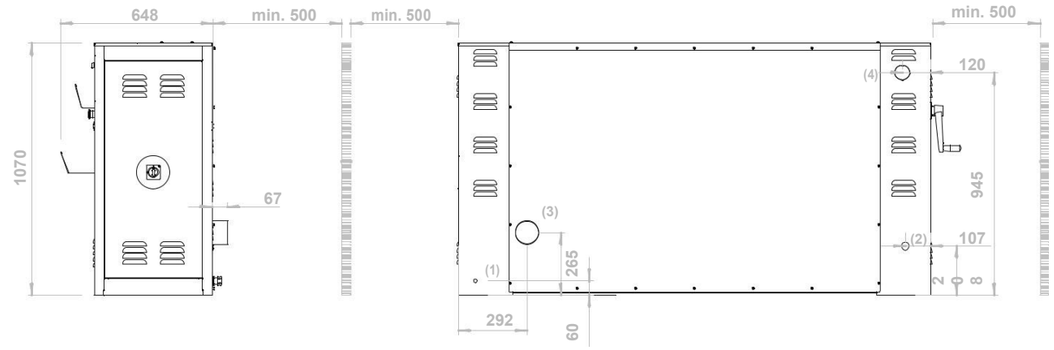

(1) ELECTRICAL CONNECTION (PG21)
(2) GAS CONNECTION (G 1/2" M)
(3) STEAM EXHAUST Ø78 mm
(4) FUMES EXHAUST Ø80 mm (only gas heated models)

G35

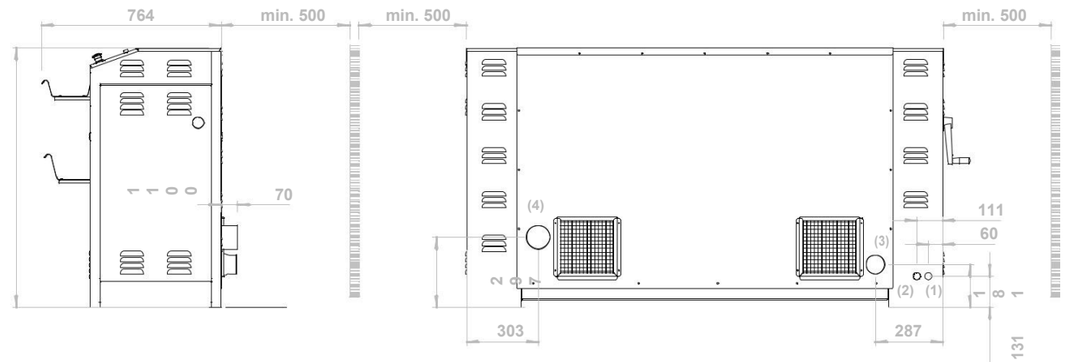

(1) ELECTRICAL CONNECTION (PG21)
(2) GAS CONNECTION (G 1/2" M)
(3) STEAM EXHAUST Ø80 mm
(4) FUMES EXHAUST Ø100 mm (only gas heated models)


GMP. WE KNOW HOW

		G21.50	G26.50	G32.50
	Cylinder Dimensions	2100 x Ø500 mm	2580 x Ø500 mm	3200 x Ø500 mm
	Supply Tension *	V.400/3N/50Hz	V.400/3N/50Hz	V.400/3N/50Hz
	HEATING SOURCE			
Electric	Heating Power	45 kW	57 kW	66 kW
Gas	Thermal Power	54 kW	67 kW	95,2 kW
	Gas Consumption Nat. Gas	5,7m³/h	7 m³/h	10 m³/h
	Gas Consumption LPG	4,3 kg/h	5,3 kg/h	7,5 kg/h
Steam	Average Consumption	50 kg/h	70 kg/h	90 kg/h
	MOTOR(S)			
Electric/Steam		1,6 kW	1,6 kW	1,6 kW
Gas		2,7 kW	2,7 kW	2,7 kW
	TOTAL ABSORPTION			
	Electric	69 A	85 A	98 A
	Gas/Steam	5 A	5 A	5 A
	Ironing Speed, Variable	1,6 8 m/min	1,6 8 m/min	1,6 8 m/min
	Steam Extraction	740 m³/h	740 m³/h	740 m³/h
	Fumes Extraction	1200 m³/h	1200 m³/h	1200 m³/h
	Hourly Production	75 kg/h el	95 kg/h el	120 kg/h el
	(Recommended Moisture)	85 kg/h gas	110 kg/h gas	135 kg/h gas
		95 kg/h steam @4bar	115 kg/h steam @4bar	145 kg/h steam @4bar
	Ironer Dimensions (wxdxh)	2880x750x1290 mm	3280x750x1290 mm	3880x750x1290 mm
	Packing Dimensions (wxdxh)	2990x920x1600 mm	3390x920x1600 mm	4190x920x1600 mm
	Weight, Gross/Net	1288/1200 kg	1413/1320 kg	1800/1700 kg

* DIFFERENT VOLTAGES THAN INDICATED AVAILABLE ON OPTION, PLEASE CONTACT OUR SALES OFFICES

CHARACTERISTICS AND DATA ARE NOT BINDING AND CAN BE SUBJECT TO CHANGE WITHOUT NOTICE.

G50

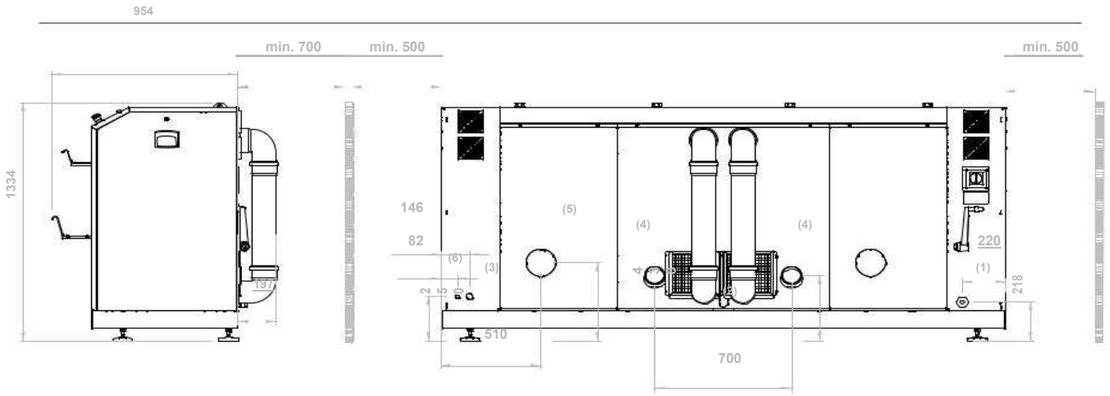

(1) ELECTRICAL CONNECTION
(PG13.5 for gas and steam heated models; PG36 for electric heated models)
(2) GAS CONNECTION (G 1" M)
(3) STEAM CONNECTION (G 1" M)
(4) STEAM EXHAUST Ø100 mm
(5) FUMES EXHAUST Ø120 mm (only gas heated models)
(6) CONDENSATE EXIT G 1/2" M (only steam heated models)

